

BMS Clutch Stop Install Guide

Last Updated: 9/12/2011

Use subject to terms and conditions posted at: <http://www.burgertuning.com/terms.htm>




Locate clutch stop by clutch pedal and pull it out by hand.



Pull OEM clutch stop out from this location and push in your new BMS clutch stop

Push your BMS short throw clutch stop in its place until fully seated. For most applications all three adjustment shims are suggested. If you find the clutch throw too short for your taste you can remove shims as needed.

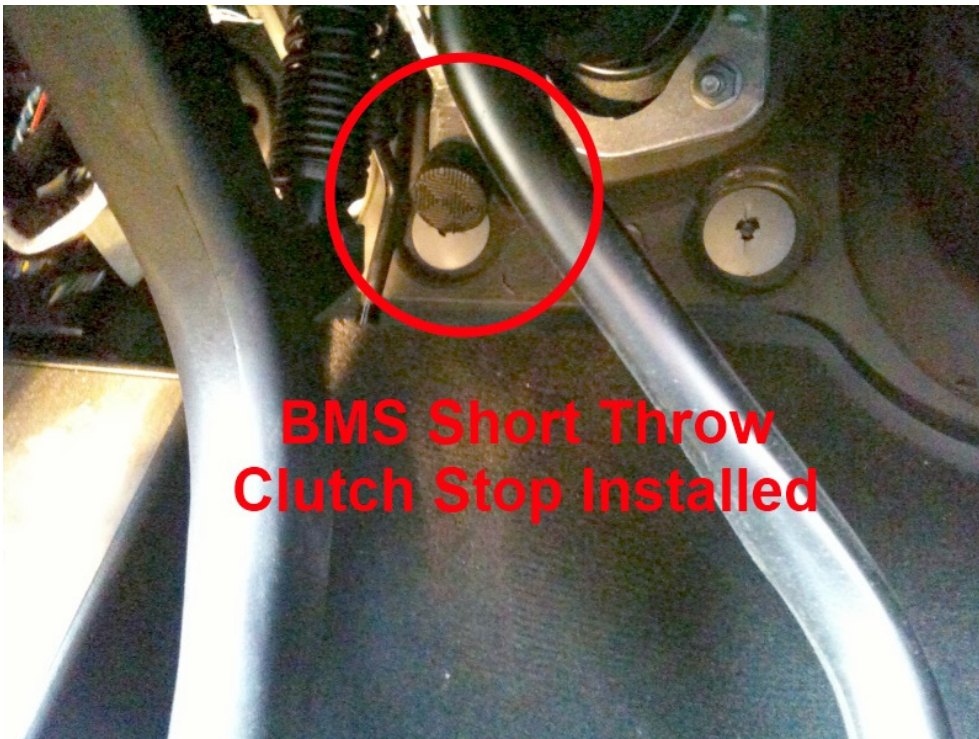

BMS Short Throw Clutch Stop Installed